



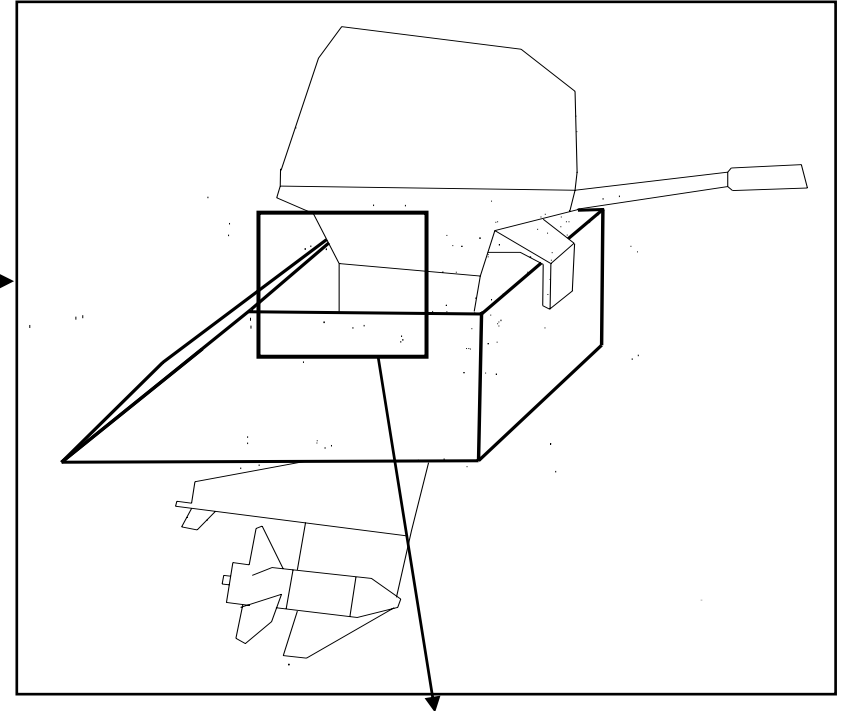

NSW DEPARTMENT OF
PRIMARY INDUSTRIES

NSW Estuary General Fishery Engine Well Discard Chute Guidelines

(for use in NSW Estuarine Waters)

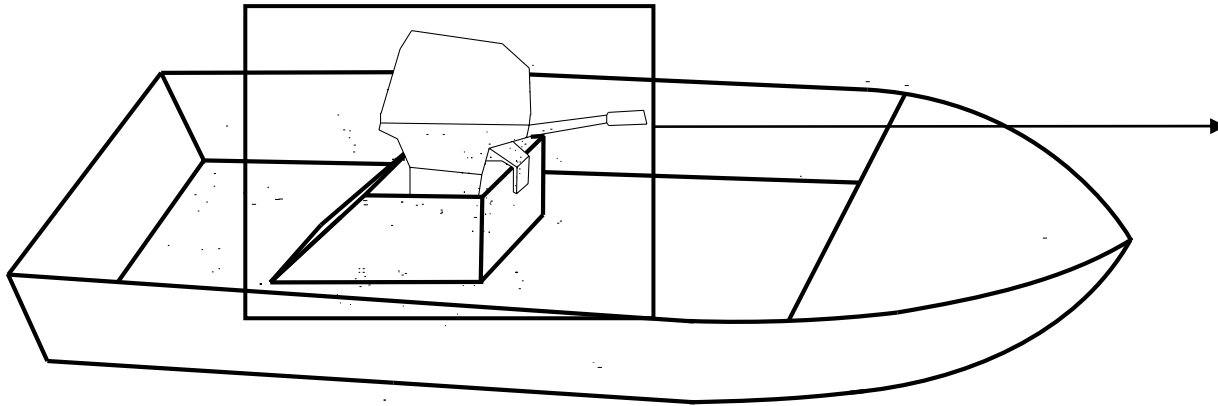

Guidelines:

1. The distance between the engine and the inner engine wall must not be less than 250 mm.
2. The vessel's engine must be out of gear and the propeller motionless when releasing fish using the engine well as a discard chute.
3. A species of fish may be released without using the engine well as a discard chute if the release of that species of fish using the discard chute is likely to harm or otherwise injure the fisher releasing the fish.

